


# READ THIS LEAFLET FIRST!!

The System Administrator may have to adjust some KX-TVP50 system parameters to those of the connected KX-T series PBX\* (see the back page for details). To adjust KX-TVP50 system parameters automatically, follow the procedure below before installing the KX-TVP50.

1. Loosen the screw and remove the side cover of the KX-TVP50.
2. Set the DIP switch to position 7 (see illustration below) with a pointed object, such as a pen, etc.

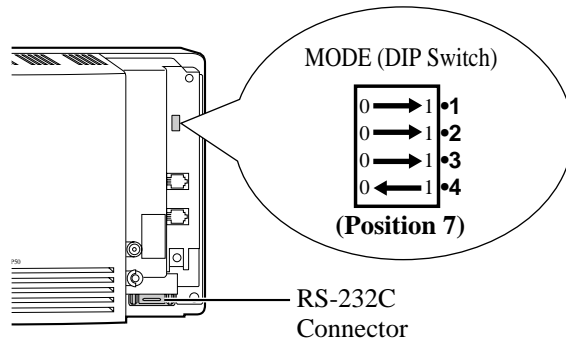

3. Connect your data terminal to the RS-232C connector (see illustration above) using an RS-232C cable. Set communication parameters of the data terminal to the following values.

Baud rate: 9600 bps  
Word bit length: 8 bits  
Parity: None  
Stop bit length: 1 bit

4. Plug in and power up the KX-TVP50. After turning the power on, the KX-TVP50 starts up with the following display.

Checking Flash Memory Cards.  
Please wait...

SELECT YOUR COUNTRY PBX

1 : TD1232/TD816G	10 : TD612G
2 : TD1232/TD816NE	11 : TD612NE
3 : TD1232/TD816FR	12 : TD612NL
4 : TD1232/TD816SL	13 : TD612SP
5 : TD1232/TD816NL	14 : TD612CE
6 : TD1232/TD816SP	15 : TA308SP
7 : TD1232/TD816JT	16 : TA308/TA616CE
8 : TD1232/TD816CE	17 : TA308/TA616PD
9 : TD816PD	


==> Enter your PBX number, e.g., "1" for KX-TD1232G.

CHANGING PARAMETER...

PARAMETER CHANGED!!  
SET THE DIP SWITCH OF THE CABINET TO POSITION <0>  
PLEASE POWER UP AGAIN!

5. KX-TVP50 system parameters have been adjusted to your PBX. Disconnect the power from the KX-TVP50.

**CAUTION:** Set the DIP switch to position 0 (see right illustration) after the adjustment.



6. Restore power to the KX-TVP50.

**Refer to the KX-TVP50 Getting Started, product documentation created in Portable Document Format (PDF) on the CD-ROM, after completing the above procedure.**

(To view the PDF documents, refer to the “Information on the CD-ROM” leaflet.)

\*: Following parameters will be automatically adjusted to your PBX if you execute the procedure in this leaflet. Please refer to the KX-TVP50 Installation Manual on the CD-ROM for details.

- “**Operator’s Extension**” ... Table 43 in B5.1 Automated Attendant Parameters
- “**Call Waiting Sequence**” ... Table 72 in B7.3 PBX Interface Parameters
- “**Flash Time**” ... Table 69 in B7.2 Port Setting
- “**Numbering Plan 1-16**” ... Table 59 in B6.7 Other Parameters
- “**Extension Number of VPS Port 1**” and “**Extension Number of VPS Port 2**” ... Table 72 in B7.3 PBX Interface Parameters
- “**Paging Code for Group 1-8**” and “**Paging Code for All Groups**” ... Table 65 in B6.7 Other Parameters